


Product data sheet

Levolan 120 glass

ceiling installation

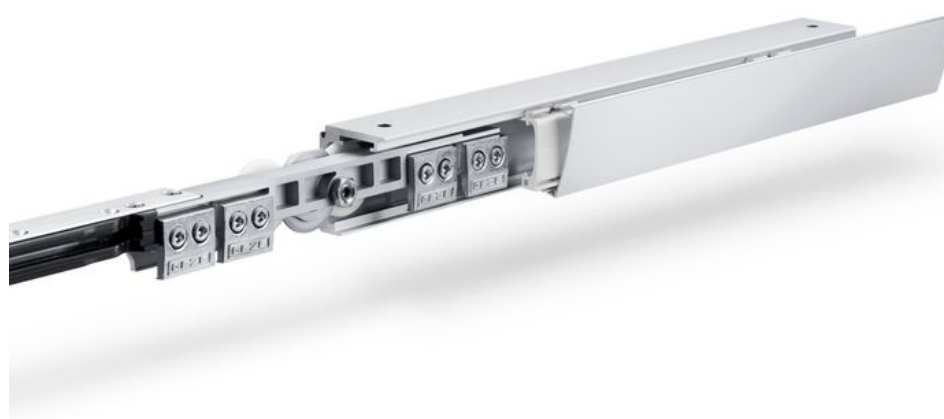

Sliding door fitting for 120 kg glass leafs and ceiling
installation



AREAS OF APPLICATION

- For design-oriented interior sliding doors for living and office areas
- For all single- and multiple-leaf sliding doors
- Installation in front of the wall
- For attachment on the wall and ceiling (directly and concealed) as well as for glass installation
- Damped on one or both sides with Levolan 120 SoftStop
- Smooth running with Levolan 120 SoftStop makes it particularly well suited for doors in living and office spaces

PRODUCT FEATURES

- Design sliding door fitting system for glass doors with ESG (toughened safety glass) 10 to 12 mm as well as LSG up to 12.76 mm and up to 120 kg leaf weight
- Slim design with integrated door fitting technology
- Fully integrated in the track
- Additional cover profile for aesthetically covering the back of the track
- The Levolan Smart fix installation system means the use of assembly tools is reduced to a minimum - for quick and convenient installation
- Final assembly of the door fitting by simple clipping
- With damping on one or both sides, for doors up to 120 kg leaf weight so that the door is stopped gently and pulled autonomously into the end position
- Tested for durability in accordance with DIN EN 1527 over 100,000 test cycles

TECHNICAL DATA

Productname

Levolan 120 glass ceiling installation

PART

COVER PROFILE FOR CEILING INSTALLATION LEVOLAN 60/120

Cover profile for Levolan 60/120 sliding door fitting



Designation	Description	Ident-No.	Colour
Cover profile for ceiling installation Levolan 60/120	for covering the back side for ceiling mounting	145600	EV1
Cover profile for ceiling installation Levolan 60/120	for covering the back side for ceiling mounting	145614	Stainless steel optic
Cover profile for ceiling installation Levolan 60/120	for covering the back side for ceiling mounting	145613	Stainless steel optic
Cover profile for ceiling installation Levolan 60/120	for covering the back side for ceiling mounting	157983	EV1
Cover profile for ceiling installation Levolan 60/120	for covering the back side for ceiling mounting	145598	EV1
Cover profile for ceiling installation Levolan 60/120	for covering the back side for ceiling mounting	145615	Stainless steel optic
Cover profile for ceiling installation Levolan 60/120	bespoke configuration	145616	
Cover profile for ceiling installation Levolan 60/120	for covering the back side for ceiling mounting	145599	EV1
Cover profile for ceiling installation Levolan 60/120	for covering the back side for ceiling mounting	157985	Stainless steel optic
Cover profile for ceiling installation Levolan 60/120	for covering the back side for ceiling mounting	145611	EV1
Cover profile for ceiling installation Levolan 60/120	for covering the back side for ceiling mounting	145612	Stainless steel optic

LSG GLASS / METAL GLUE *

Glass metal glueing kit for connecting aluminium brackets with glass panes



Designation	Description	Ident-No.
LSG glass / metal glue 50 g *	for up to 30 sliding panels	133039

LEVOLAN 120 COMPLETE SET

Levolan sliding door fitting for leaf weights up to 120 kg



Levolan 120 glass ceiling installation



Designation	Description	Ident-No.	Colour	Leaf width (min.)	Leaf width (max.)
Levolan 120 complete set	For wall installation	157943	Stainless steel optic	640 mm	1240 mm
Levolan 120 complete set	For wall installation	157940	EV1	640 mm	1440 mm
Levolan 120 complete set	For wall installation	157944	Stainless steel optic	640 mm	1440 mm
Levolan 120 complete set	For wall installation	157939	EV1	640 mm	1240 mm

ACCESSORIES

SPACER PROFILE FOR WALL CLEARANCE LEVOLAN 60 / 120

Spacer profile for wall installation of Levolan 60/120



Designation	Description	Ident-No.	Colour
Spacer profile for wall clearance Levolan 60 / 120	10 mm additional space, can be stacked up to 20 mm	157993	Stainless steel optic
Spacer profile for wall clearance Levolan 60 / 120	10 mm additional space, can be stacked up to 20 mm	147571	Stainless steel optic
Spacer profile for wall clearance Levolan 60 / 120	10 mm additional space, can be stacked up to 20 mm	147557	EV1
Spacer profile for wall clearance Levolan 60 / 120 *	10 mm additional space, can be stacked up to 20 mm	147559	Stainless steel optic
Spacer profile for wall clearance Levolan 60 / 120	10 mm additional space, can be stacked up to 20 mm	147572	Stainless steel optic
Spacer profile for wall clearance Levolan 60 / 120	10 mm additional space, can be stacked up to 20 mm	147558	EV1
Spacer profile for wall clearance Levolan 60 / 120	bespoke configuration	147573	
Spacer profile for wall clearance Levolan 60 / 120	10 mm additional space, can be stacked up to 20 mm	157991	EV1
Spacer profile for wall clearance Levolan 60 / 120	10 mm additional space, can be stacked up to 20 mm	147560	Stainless steel optic
Spacer profile for wall clearance Levolan 60 / 120	10 mm additional space, can be stacked up to 20 mm	147556	EV1
Spacer profile for wall clearance Levolan 60 / 120	10 mm additional space, can be stacked up to 20 mm	147555	EV1

Levolan 120 glass ceiling installation



LEVOLAN 120 SOFTSTOP SET, DAMPED ON ONE SIDE, UP TO 120 KG

Levolan SoftStop draw-in damping on one side left version



Designation	Description	Ident-No.	Leaf width (min.)	Leaf width (max.)
Levolan 120 SoftStop set, damped on one side, up to 120 kg	for draw-in damping left, consisting of: 1 x damping unit, 2 x spacers for cover panel bracket, 1 x trigger, can also be retrofitted - minimum leaf width on one side 900 mm, on both sides 1,325 mm	157999	900 mm	1440 mm

* The products designated above may vary in form, type, characteristics, function, or availability depending on the country. Please get in touch with your GEZE contact person if you have any questions.